On demand photo printing for retail, hospitality and events







A truly portable way to print photos, cards and calendars

Bring the benefits of portable, flexible photo and card printing to your business with the SureLab SL-D500.

A compact, lightweight and stackable production printer, the SL-D500 is ideal for creating 10x15cm and 9x13cm simplex and duplex photos, cards and calendars.

Compact, on-site production

The SL-D500 allows photo retailers and copy shops to free-up their larger printers for higher-value orders.

Designers, artists and card makers will appreciate the printer's compact footprint and ease-of-use, while hospitality and events users will benefit from the SL-D500's portable, lightweight design that makes it easy to move around or fit onto a desk, counter or reception desk.


Easily print high-quality photos

Although the SL-D500 is Epson's most compact and lightweight SureLab printer, photo quality has not been compromised and matches that of its big brother, the SureLab SL-D1000(A).

The SL-D500 is highly reliable and as easy to use as a home printer, with an automatic sheet feeder and CISS ink system enabling printing of up to 100 sheets with no user intervention.

Sustainable solution

The SL-D500 helps reduce your environmental impact. It's heat-free, and has low power consumption, offering an energy-efficient and eco-optimised way to produce smaller prints. Designed to minimise environmental impact, the SL-D500 has a reduced CO₂ shipping footprint and requires less energy per print than previous models. In fact. since the launch of the first SureLab printer over 10 years ago, Epson has consistently reduced their operating energy consumption from 500 Watts to just 18 Watts. Environmental sustainability is further enhanced by making the ink bottle carton box from 100% recycled

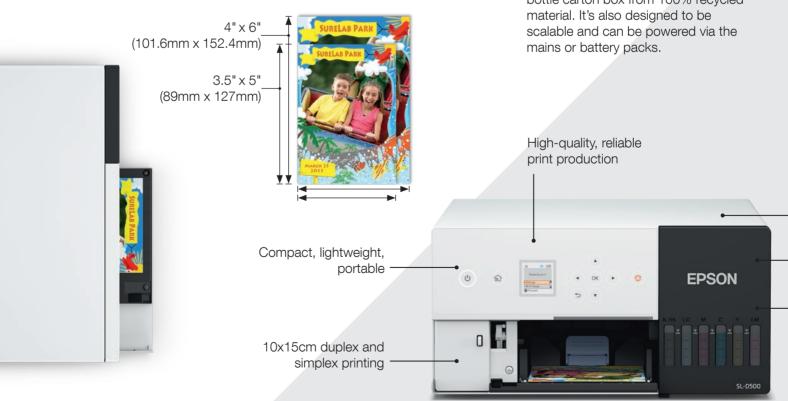



Combining convenience with high-quality printing and low TCO

Seamless integration

Thanks to the SL-D500's robust design with 4-sided metal casing, up to three printers can be stacked in a production tower to improve productivity. Its small footprint enables it to fit seamlessly into most environments and it can work alongside other Epson printers.

Extensive connectivity

The SL-D500 offers a range of connectivity options. Control it using an app, or via USB, LAN, and Wi-Fi. The printer also supports Epson Cloud Solution PORT and OrderController.



Stackable and scalable

Eco-optimised with low power usage¹

USB, LAN and Wi-Fi connectivity





¹ Supports battery powered operation. Batteries sold separately. We do not guarantee compatibility with all batteries. For details, please contact local dealer.

Print technology Printing method Epson Micro Piezo drop-on-demand inkjet technology, High-performance print head technology designed for re-environments, Variable Sized Droplet Technology Max. resolution 1.440 x 720 dpi Minimal droplet size 2.5 pl Print speed simplex - High speed/ Standard/High quality 250/180/100 - 15 x 10 cm (6 x 4", borderless) prints/h Ink Print speed duplex - Standard 80 - 10x15cm borderless prints/h Ink Ink set 6 colours, Ink bottle, T54C Ink Family Available colours Black, Cyan, Light Cyan, Light Magenta, Magenta, Yelic Ink volume per colour 70ml Ink technology UltracChrome* D6r-S Media Media handling 100 10x15cm sheet cassette (simplex, auto duplex) Supported sheet size (cassette/duplex) 0.20mm to 0.265mm Connectivity Interfaces Hi-Speed USB, 100BASE-TX/10BASE-T, EEE802.11b/ Printer language ESC/P-R Memory 0,5GB Environmental conditions Temperature (operating) 10 to 35°C Humidity (storage) 20 to 80% (no condensation) Temperature (storage) Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Humidi	obust printing
Minimal droplet size 2.5 pl	
Print speed simplex - High speed/ Standard/High quality	
Standard/High quality	
Print speed duplex - Standard 80 - 10x15cm borderless prints/h	
Ink set Available colours Ink volume per colour Ink technology IlltracChrome® D6r-S Media Media Media handling Supported sheet size (cassette/duplex) Paper thickness (cassette/duplex) Interfaces Memory O,5GB Environmental conditions Temperature (storage) Temperature (storage) Temperature (storage) Frinting (open Tray) Printing (open Tray) Stackable Device security Ink set Available colours Black, Cyan, Light Cyan, Light Magenta, Magenta, Yellot Paper, Light Magenta, Magenta, Yellot Toml Toml Toml Toml Temperature (storage) IlltracChrome® D6r-S Withita Semm to 102mm Length: 127mm to 152mm Length: 127mm to 152mm Length: 127mm to 152mm Length: 127mm to 152mm Length: 152mm Length: 152mm Length: 10 to 0.265mm With: Semm to 102mm Length: 80 to 100 to 152mm Length: 10 to 0.265mm With: Semm to 102mm Length: 10 to 0.265mm Hii-Speed USB, 100BASE-TX/10BASE-T, EEE802.11b/ Printer language ESC/P-R Memory 0,5GB Temperature (operating) 10 to 35°C Humidity (operating) 10 to 35°C Humidity (operating) 20 to 80% (no condensation) Temperature (storage) Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1	
Available colours Ink volume per colour Ink technology UltracChrome® D6r-S Media Media handling Supported sheet size (cassette/duplex) Paper thickness (cassette/duplex) University Univers	
Ink volume per colour Ink technology UltracChrome® D6r-S Media handling Supported sheet size (cassette/duplex) Paper thickness (cassette/duplex) UltracChrome® D6r-S Width: 89mm to 102mm Length: 127mm to 152mmm Paper thickness (cassette/duplex) Paper thickness (cassette/duplex) Unterfaces Printer language ESC/P-R Memory U,5GB Environmental conditions Temperature (operating) Temperature (storage) Temperature (storage) Universal 60°C Storage (after unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 to 2 storage (after unpacking): -20°C to 40°C, 1 month at 2 storage (after unpacking): -20°C to 40°C, 1 month at 4 to 2 storage (after unpacking): -20°C to 40°C, 1 month at 4 to 3 storage (after unpacking): -20°C to 40°C, 1 month at 4 to 3 storage (after unpacking): -20°C to 40°C, 1 month at 4 to 3 storage (after unpacking): -20°C to 40°C, 1 month at 4 to 3 storage (after unpacking): -20°C to 40°C, 1 month at 4 to 3 storage (after unpacking): -20°C to 40°C, 1 month at 4 to 3 storage (after unpacking): -20°C to 40°C, 1 month at 4 to 3 storage (after unpacking): -20°C to 40°C, 1 month at 4 to 4	
Ink technology Media handling Media handling Supported sheet size (cassette/duplex) Width: 89mm to 102mm Length: 127mm to 152mmm Paper thickness (cassette/duplex) Unterfaces Interfaces Printer language ESC/P-R Memory Memory Memory Memory Memory Memory Memory Memory Dimensions wxdxh (mm²) Printing (open Tray) Stackable Device security Media handling 100 10x15cm sheet cassette (simplex, auto duplex) Width: 89mm to 102mm Length: 127mm to 152mmm 10 20mm to 0.265mm Hi-Speed USB, 100BASE-TX/10BASE-T, EEE802.11b/ Printer language ESC/P-R Memory 0,5GB 10 to 35°C Humidity (operating) 10 to 35°C Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (a	W
Media Media handling 100 10x15cm sheet cassette (simplex, auto duplex) Supported sheet size (cassette/duplex) Width: 89mm to 102mm Length: 127mm to 152mmm Paper thickness (cassette/duplex) 0.20mm to 0.265mm Connectivity Interfaces Hi-Speed USB, 100BASE-TX/10BASE-T, EEE802.11b/ Printer language ESC/P-R Memory 0,5GB Environmental conditions Temperature (operating) 10 to 35°C Humidity (operating) 20 to 80% (no condensation) Temperature (storage) Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 40°C Storage (after unpacking): -20°C to 40°C, 1 month at 20°C Storage (after unpacking): -20°C to 40°C, 1 month at 40°C Storage 299x350x154 Weight (kg) 7 Stackable Yes, up to 3 units Kensington lock connection; Password Encryption (LCI	
Supported sheet size (cassette/duplex) Paper thickness (cassette/duplex) Interfaces Interfaces Printer language Environmental conditions Temperature (operating) Temperature (storage) Temperature (storage) Temperature (storage) Temperature (storage) Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 299x400x154 Storage Printing (open Tray) Storage Yes, up to 3 units Kensington lock connection; Password Encryption (LCE)	
Length: 127mm to 152mmm Paper thickness (cassette/duplex) 0.20mm to 0.265mm Interfaces Hi-Speed USB, 100BASE-TX/10BASE-T, EEE802.11b/ Printer language ESC/P-R Memory 0,5GB Environmental conditions Temperature (operating) 10 to 35°C Humidity (operating) 20 to 80% (no condensation) Temperature (storage) Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 Humidity (storage) 5 - 85% (no condensation) Dimensions wxdxh (mm³) Printing (open Tray) 299x400x154 Storage 299x350x154 Weight (kg) 7 Stackable Yes, up to 3 units Device security Kensington lock connection; Password Encryption (LCI	
Interfaces Hi-Speed USB, 100BASE-TX/10BASE-T, EEE802.11b/ Printer language ESC/P-R Memory 0,5GB Environmental conditions Temperature (operating) 10 to 35°C Humidity (operating) 20 to 80% (no condensation) Temperature (storage) Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 Humidity (storage) 5 - 85% (no condensation) Dimensions wxdxh (mm³) Printing (open Tray) 299x400x154 Storage 299x350x154 Weight (kg) 7 Stackable Yes, up to 3 units Kensington lock connection; Password Encryption (LCI	
Printer language ESC/P-R Memory 0,5GB Environmental conditions Temperature (operating) 10 to 35°C Humidity (operating) 20 to 80% (no condensation) Temperature (storage) Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 Humidity (storage) 5 - 85% (no condensation) Dimensions wxdxh (mm³) Printing (open Tray) 299x400x154 Storage 299x350x154 Weight (kg) 7 Stackable Yes, up to 3 units Kensington lock connection; Password Encryption (LCC)	
Memory 0,5GB Temperature (operating) 10 to 35°C Humidity (operating) 20 to 80% (no condensation) Temperature (storage) Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 Humidity (storage) 5 - 85% (no condensation) Dimensions wxdxh (mm³) Printing (open Tray) 299x400x154 Storage 299x350x154 Weight (kg) 7 Stackable Yes, up to 3 units Kensington lock connection; Password Encryption (LCE	g/n (WiFi)
Temperature (operating) Humidity (operating) Temperature (storage) Temperature (storage) Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 Humidity (storage) Frinting (open Tray) Storage 299x400x154 Weight (kg) Yes, up to 3 units Kensington lock connection; Password Encryption (LCE)	
Humidity (operating) Temperature (storage) Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 Humidity (storage) 5 - 85% (no condensation) Printing (open Tray) Storage 299x400x154 Storage 299x350x154 Weight (kg) 7 Stackable Yes, up to 3 units Kensington lock connection; Password Encryption (LCE	
Temperature (storage) Storage (before unpacking): -20°C to 60°C, 1 month at 120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 Humidity (storage) 5 - 85% (no condensation) Printing (open Tray) 299x400x154 Storage 299x350x154 Weight (kg) 7 Stackable Yes, up to 3 units Kensington lock connection; Password Encryption (LCE	
120 hours at 60°C Storage (after unpacking): -20°C to 40°C, 1 month at 4 Humidity (storage) 5 - 85% (no condensation) Printing (open Tray) 299x400x154 Storage 299x350x154 Weight (kg) 7 Stackable Yes, up to 3 units Kensington lock connection; Password Encryption (LCD)	
Humidity (storage) 5 - 85% (no condensation) Printing (open Tray) 299x400x154 Storage 299x350x154 Weight (kg) 7 Stackable Yes, up to 3 units Device security Kensington lock connection; Password Encryption (LCE	
Storage 299x350x154 Weight (kg) 7 Stackable Yes, up to 3 units Device security Kensington lock connection; Password Encryption (LCE	<u>,</u>
Weight (kg) 7 Stackable Yes, up to 3 units Device security Kensington lock connection; Password Encryption (LCD)	
Stackable Yes, up to 3 units Device security Kensington lock connection; Password Encryption (LCE	
Device security Kensington lock connection; Password Encryption (LCI	
Control panel Colour/1 44 inch))
Goldan 1.44 inon	
Electrical specification Voltage; rated current AC 100 to 120V; 09A, 220 to 240V,50/60Hz; 1.4A	
Power consumption Operating/Ready/Sleep/Power off (Standby) Approx 18W/Approx. 3,8W/Approx. 1,4W/Approx. 0,38 240V)	W (AC 220 -
Acoustic noize level Sound pressure level <db(a)> Approx. 46dB(A) or less</db(a)>	
Options	Controller LE
Consumable Consumable Consumable Maintenance Box, Roller Assembly Kit; T54C Ink set; Si Paper DS Glossy/Luster 190; Surelab Photo Paper DS 225; Surelab Photo Paper Glossy/Luster 250	
System Supported OS OS :Windows®10; Windows®8.1; for each 32bit/64bit OS: Macintosh Mac OS X (10.9.5 or later); macOS 11x	
Others Product lifetime Replacement timing of lifetime management parts: 100, printing or 5 years use	
What's in the box Printer, Maintenance box, Setup guide, CD, AC cable	· ·

